



UPM/EC

MOBILE AIR PURIFYING UNITS

- PLUG & PLAY SYSTEM WITH AUTOMATIC CONTROL
- UVC GERMICIDAL CHAMBER
- 4 STAGES OF FILTRATION
- IDEAL FOR THE HOSPITALITY AND OTHER INDUSTRIES
- LOW-POWER, EC MOTOR TECHNOLOGY
- 25 MM THICK ACOUSTIC CASE



STAGES OF FILTRATION



UPM/EC

The UPM / EC air purifying units have been designed for mobility, purifying and cleaning air and eliminating odours, **in areas of high occupancy where low noise and versatility are important.**



ENERGY SAVING

The air inlet aperture has been designed to aid laminar air flow which, together with a dynamic pressure balancing chamber, helps to optimise efficiency.

The EC motor's high-performance technology is a key element in reducing electrical consumption.



LOW SOUND LEVEL

The 25mm thick noise reducing outer panels use bespoke, high quality insulating materials and make this ideal equipment for installation in areas where a low noise level is required.



DURABILITY

The outer panels of these units are made of pre-finished sheet metal with 40mm aluminium structural frames to maximise the life of the equipment.



EASE OF INSTALLATION AND MAINTENANCE

The access door allows quick access to clean the impeller and replace filters.

F

CONFIGURABLE FILTRATION STAGES

In addition to the odour eliminating activated carbon filter, the equipment has two intake pre-filters and one discharge filter, with a range of configurations, all giving the equipment an excellent filtration performance.

⏻


INTEGRATED CONTROL SYSTEM

- ON / OFF fan
- Adjustable flow 0% - 100%
- ON/OFF germicidal chamber
- Time control
- Control and alarm of dirty filters
- Automatic operation

💧

WASHABLE PRE-FILTER


The first pre-filter catches small, lint type particles, together with larger particles and is dishwasher safe.

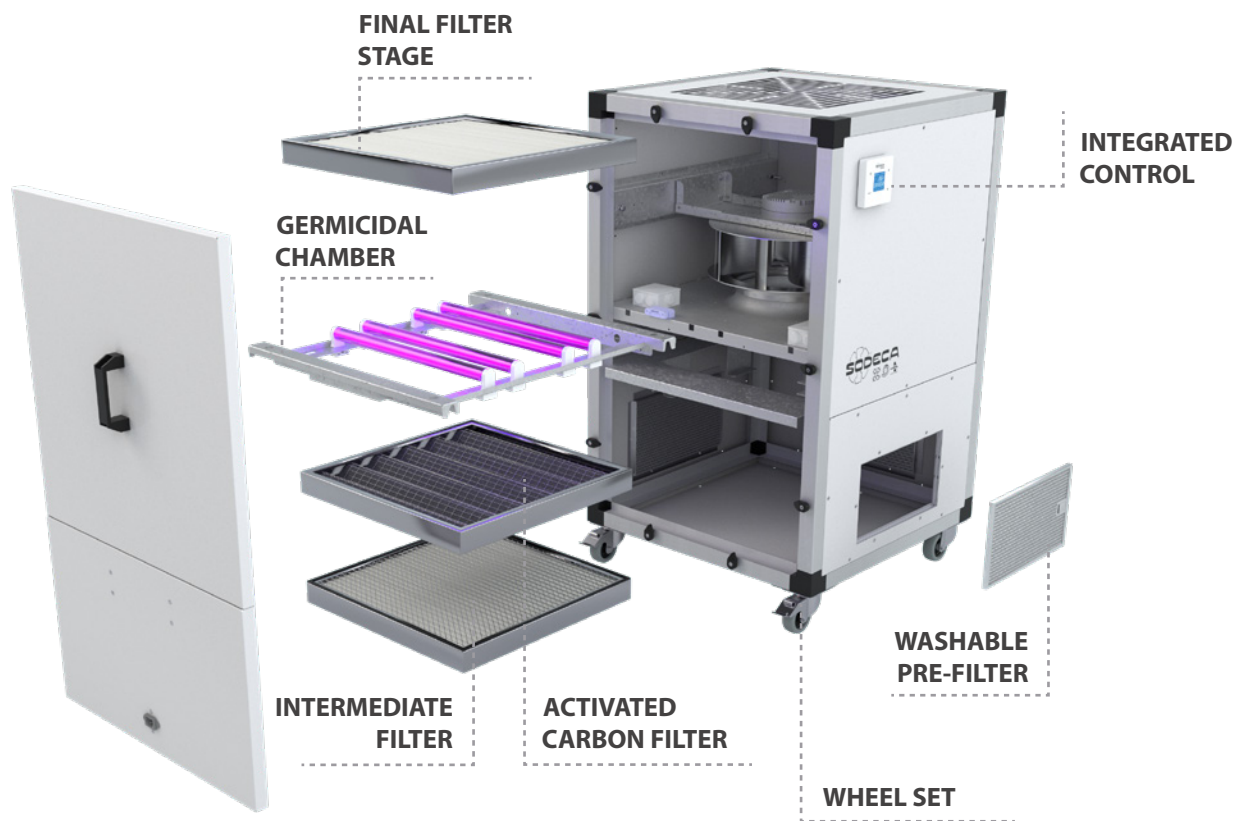

CG

GERMICIDAL CHAMBER

Depending on model, these purification units can be supplied with an integrated germicidal chamber, using UV ultraviolet lamps "C" range.

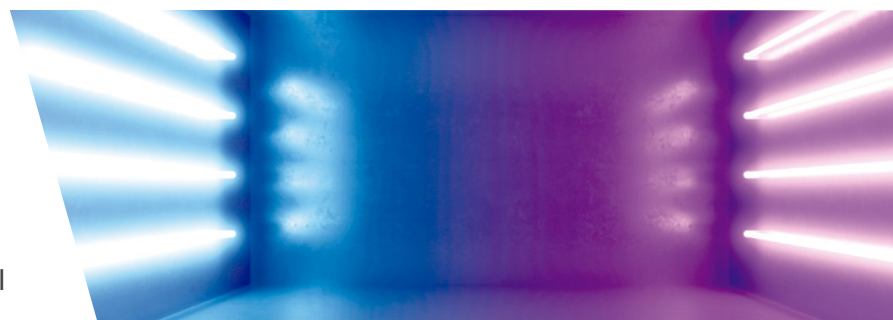

UPM/EC



Mobile air purifying units, designed for cleaning and purifying indoor air and eliminating odours in any type of room.



Characteristics:

- Frame made from 40mm profile aluminium.
- Set of wheels.
- Plug & Play system with integrated control.
- Control and dirty filters alarm.
- Outer panels made of 25 mm thick, high quality acoustic insulation, and pre-finished sheet metal.
- Backward curved impeller.
- Dishwasher safe pre-filter.
- Filtration stages, depending on model:
 - F7 + F9
 - F7 + HEPA H14
- Activated carbon filter for odour removal.
- Inspection cover for maintenance and filter replacement.
- Germicidal chamber with UVc (256 nm), depending on model.

Motor:

- High efficiency EC technology, external rotor motor, controllable by 0-10V signal.
- Single phase 200-240V- 50 / 60Hz.
- Air temperature range of -25°C to +60°C.

Finish:

- Aluminum profile frame and pre-finished sheet metal with 25mm thick acoustically insulated panels.

On request:

- Particle sensor for automatic monitoring.

Order code

UPM/EC	-	310	-	F7+F9	-	CG
↓		↓		↓		↓
Mobile air purifying units		Impeller diameter in mm		Filter F7 + F9 Filter F7 + HEPA H14		UVc germicidal chamber

Filter characteristics

Filters	EN 779 Em	EN 1822	ISO 16890			
			ISO ePM ₁	ISO ePM _{2,5}	ISO ePM ₁₀	ISO COARSE
F7	90%	-	>50%	>65-95%	>85%	-
F9	95%	-	>80%	>95%	>95%	-
HEPA H14	-	>99,995%	-	-	-	-


Technical characteristics

Model	Recommended effective working area ¹ (m ²)		Speed (r/min)	Maximum power (W)	Power supply	Sound pressure level at 50% of max speed ² (dB(A))	Maximum flow rate (m ³ /h)		Weight (kg)
	Filters (F7+F9)	Filters (F7+H14)					Filters (F7+F9)	Filters (F7+H14)	
UPM/EC-310	65	55	1920	175	200-240V 50/60Hz 1Ph	47	550	450	55
UPM/EC-310/H	115	90	2377	450	200-240V 50/60Hz 1Ph	55	950	750	57
UPM/EC-400	190	155	1550	460	200-240V 50/60Hz 1Ph	47	1600	1300	97

¹ Recommended effective working area with a 3-meter-high premises. ² Radiated sound pressure level in dB (A) at 3 m distance

Technical characteristics of the UVc germicidal chamber

Depending on model, these purification units can be supplied with an integral germicidal chamber, using UV ultraviolet lamps "C" in a spectrum of 256 nm, indicated wave amplitude, to inactivate a wide variety of microorganisms by absorbing short wavelength energy through DNA and RNA. For specific types of viruses or bacteria that are affected by the radiation dose in the germicidal chamber, consult the specific document.

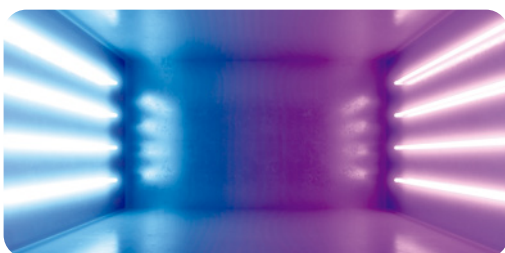

Model	Number of lamps	Electrical power (W)	UVc radiation power (W)	Radiation dose* (mJ/cm ²)
UPM/EC-310	6	54	16,8	6,7
UPM/EC-310/H	6	54	16,8	4,5
UPM/EC-400	4	102	28	5,4

*Minimum dose calculated based on flow with F7+H14 filters.



Erp. (Energy Related Products)

Information on Directive 2009/125 / EC downloadable from the SODECA website or QuickFan selection program.

Dimensions mm



Model	A	B	H
UPM/EC-310	542	500	960
UPM/EC-310/H	542	500	960
UPM/EC-400	742	700	1210

*Data subject to change without prior notice.



HEADQUARTERS Sodeca, S.L.U.

Pol. Ind. La Barricona
Carrer del Metall, 2
E-17500 Ripoll
Girona, SPAIN
Tel. +34 93 852 91 11
Fax +34 93 852 90 42
General sales: comercial@sodeca.com
Export sales: ventilation@sodeca.com

PRODUCTION PLANT Sodeca, S.L.U.

Ctra. de Berga, km 0,7
E-08580 Sant Quirze de Besora
Barcelona, SPAIN
Tel. +34 93 852 91 11
Fax +34 93 852 90 42
General sales: comercial@sodeca.com
Export sales: ventilation@sodeca.com



EUROPE

FINLAND Sodeca Finland, Oy

HUITTINEN
Sales and Warehouse
Mr. Kai Yli-Sipilä
Metsälinnankatu 26
FI-32700 Huittinen
Tel. + 358 400 320 125
orders.finland@sodeca.com

HELSINKI
Smoke Control Solutions
Mr. Antti Kontkanen
Vilppulantie 9C
FI-00700 Helsinki
Tel. +358 400 237 434
akontkanen@sodeca.com

HYVINKÄÄ
Industrial Applications
Mr. Jaakko Tomperi
Niinistökatu 12
FI-05800 Hyvinkää
Tel. +358 451 651 333
jtomperi@sodeca.com

ITALIA Marelli Ventilazione, S.R.L.

Viale del Lavoro, 28
37036 San Martino B.A.
(VR), ITALY
Tel. +39 045 87 80 140
vendite@sodeca.com

PORTUGAL Sodeca Portugal, Unip. Lda.

PORTO
Rua Veloso Salgado 1120/1138
4450-801 Leça de Palmeira
Tel. +351 229 991 100
geral@sodeca.pt

LISBOA
Pq. Emp. da Granja Pav. 29
2625-607 Vialonga
Tel. +351 219 748 491
geral@sodeca.pt

ALGARVE
Rua da Alegria, 33
8200-569 Ferreiras
Tel. +351 289 092 586
geral@sodeca.pt

UNITED KINGDOM Sodeca Fans UK, Ltd.

Mr. Mark Newcombe
Tamworth Enterprise Centre
Philip Dix House, Corporation
Street, Tamworth, B79 7DN
UNITED KINGDOM
Tel. +44 (0) 1827 216 109
sales@sodeca.co.uk

AMERICA

CHILE Sodeca Ventiladores, SpA.

Sra. Sofía Ormazábal
Santa Bernardita 12.005
(Esquina con Puerta Sur)
Bodegas 24 a 26,
San Bernardo, Santiago, CHILE
Tel. +56 22 840 5582
ventas.chile@sodeca.com

COLOMBIA Sodeca Latam, S.A.S.

Sra. Luisa Stella Prieto
Calle7 No. 13 A-44
Manzana 4 Lote1, Montana
Mosquera, Cundinamarca
Bogotá, COLOMBIA
Tel. +57 1 756 4213
ventascolombia@sodeca.co

PERU Sodeca Perú, S.A.C.

Sr. Jose Luis Jiménez
C/ Mariscal Jose Luis de
Orbegoso 331. Urb. El pino,
15022, San Luis. Lima, PERU
Tel. +51 1 326 24 24
Cel. +51 994671594
comercial@sodeca.pe

RUSSIA

RUSSIA Sodeca, L.L.C.

Mr. Stanislav Alifanov
Severnoye Shosse, 10 room 201
Business Park Plaza Ramstars
140105 Ramenskoye,
Moscow region, RUSSIA
Tel. +7 495 955 90 50
alifanov@sodeca.com



www.sodeca.com

